


10/2019



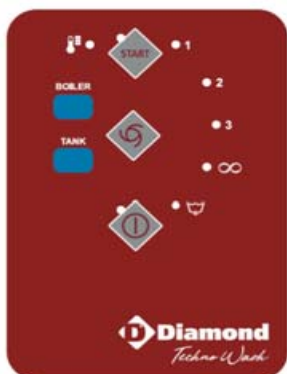

# **Mod: DATIC20E/7**

**Production code: T201BET**


	Model	<b>DATIC 20-E/7</b>	
	Code Production	T201BET	
Interface :			




	Overall Dimension (Width-Depth-Height) *open	mm	1.701 x 770 x 1.615(2088*)
	Packaging Dimension (WxDxH)	mm	2.100 x 920 x 1.850
	Gross weight	Kg	320
	Net weight	Kg	280
	Volume	mc	3,8
	Rack size	mm	500x500
	Useable wash chamber height	mm	450
	Tank wash construction		deep drawn
	Tank pre-wash construction		-
	General construction		double skin
	Door Construction		double skin and insulated
	Wash Tank volume	liter	70
	Wash Tank heating element	W	10500
	Wash Tank surface strainers		stainless steel
	Pre-Wash Tank volume	liter	-
	Pre-Wash Tank heating element	W	-
	Pre-Wash Tank surface strainers		-
	Wash pump type		double flow
	Wash pump power	W	2700
	Wash pump delivery	Lt/min	1050
	Wash temperature	°C	60
	Pre-Wash pump type		-
	Pre-Wash pump power	W	-
	Pre-Wash temperature	°C	-
	Boiler volume	liter	17
	<b>Boiler heating element (with 50°C inlet water) standard</b>	<b>W</b>	<b>9500</b>
	Boiler heating element (with 10°C inlet water)	W	16000
	Boiler heating element (with 10°C inlet water +DCM-R/7)	W	12000
	Back-flow system		break tank
	Rinse type		multiple rinse
	Pre-Rinse pump	W	200
	Pre-rinse pump delivery	Lt/min	110
	Pre-Rinse tank	liter	5
	Rinse temperature	°C	85
	Rinse water consumption	Liter /hour	160
	Inlet water temperature	°C	Cold:10-40°C Hot:45-60°C
	Optimal external water pressure	bar	from 1 to 4



	<i>Drain system</i>		<i>overflow</i>
	<i>Drain size</i>	G	1' ½"
	<i>Productivity – speed 1</i>	<i>Racks per hour</i>	200
	<i>Productivity – speed 2</i>	r/h	150
	<i>Productivity – speed 3</i>	r/h	95
			-
	<i>Noise level</i>	db	< 70
	<i>Conveyor power</i>	W	500
	<i>Electric Connection</i>	V - ph - Hz	400V 3+N 50Hz
	<b>Max Electric Power with 50°C standard (+dray unit)*</b>	<b>W</b>	<b>23700 (30250)*</b>
	<i>Max Electric Power with 10°C (+dray unit)*</i>	W	30200 (36750)*
	<i>Max Electric Power with 10°C +DCM-R/7 (+dray unit)*</i>	W	24900 (31450)*
	<i>Plates racks</i>	Nr	YES (x2)
	<i>Flat Rack</i>	Nr	YES
	<i>Cutterly Rack</i>	Nr	YES
	<i>Electric cable</i>		<i>not included</i>
	<i>Drain hose</i>		YES
	<i>Fill hose</i>		YES

<i>Rinse aid and detergent dispenser (DDL-Y)</i>	<i>Optional</i>
<i>Increase power for cold feed 10°C (DRC-W/7)</i>	<i>Optional</i>
<i>Drying tunnel (DSM-A/7)</i>	<i>Optional</i>
<i>Drying tunnel on 90° curve (DSM90-7)</i>	<i>Optional</i>
<i>Heat recovery system (DCM-R/7)</i>	<i>Optional</i>
<i>Suction system (DMA-E/7)</i>	<i>Optional</i>
<i>Emergency switch (SCP-7)</i>	<i>Optional</i>
<b><i>End limit switch</i></b>	<b><i>Standard built in</i></b>

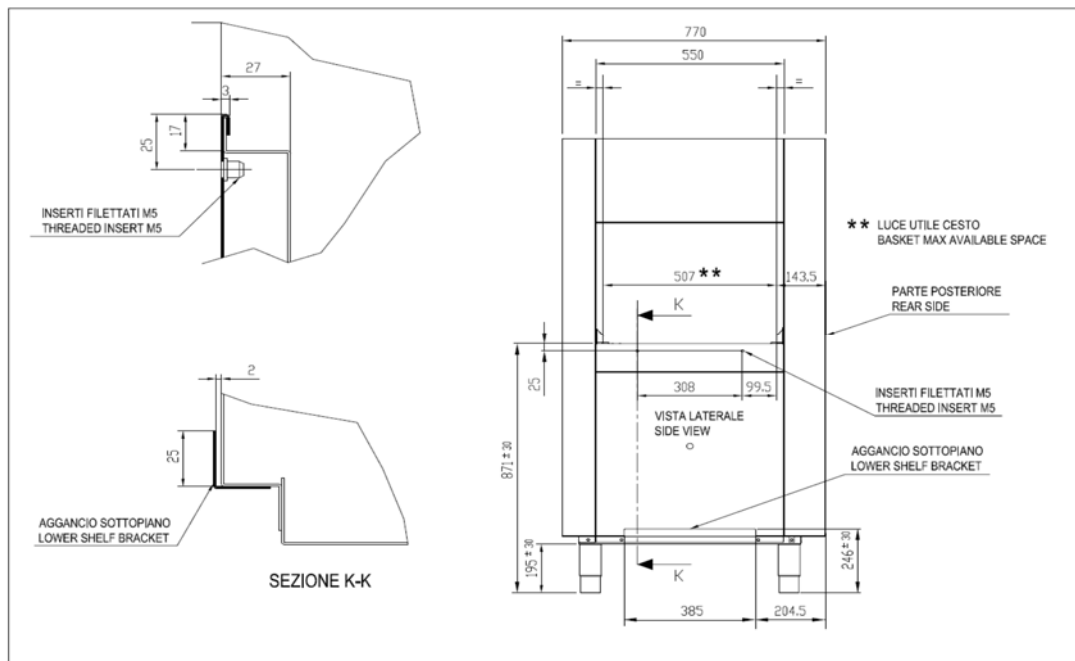

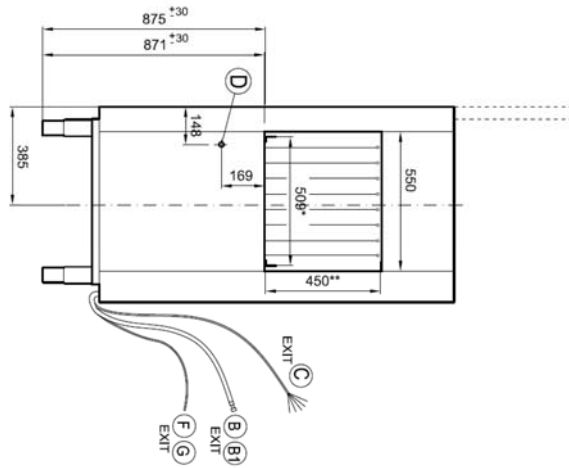

\* USEFUL WIDTH FOR BASKET  
\*\* USEFUL HEIGHT FOR BASKET

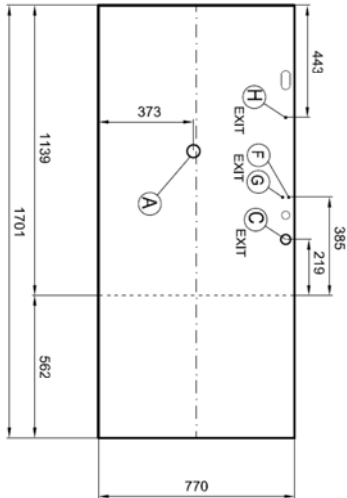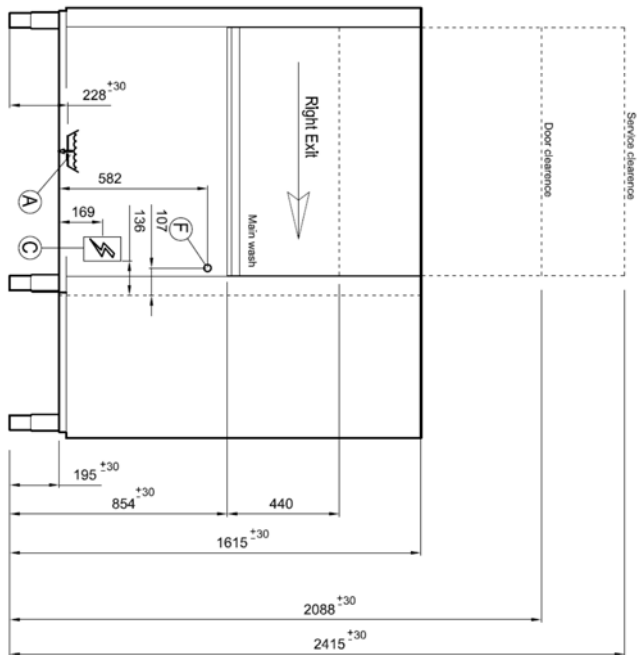

A		Ø 1 1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent Inlet
B1		G 3/4" M	G		Ø 7 M	Rinse aid Inlet
C		PG36 Power supply	H		Ø 6	Equipotential



L		Ø 250	Dryer suction
---	--	-------	---------------

<b>Installation layout</b>		<b>Rack Type</b>	
Designed by:	M.PUCCI	Date:	15/05/2015
Determination:		Code:	T201D
		Rev.:	00



A		Ø 1"1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent inlet
B1		G 3/4" M	G		Ø 7 M	Rinse aid inlet
C		PG36	H		Ø 6	Equipotential

\* USEFUL WIDTH FOR BASKET  
 \*\* USEFUL HEIGHT FOR BASKET

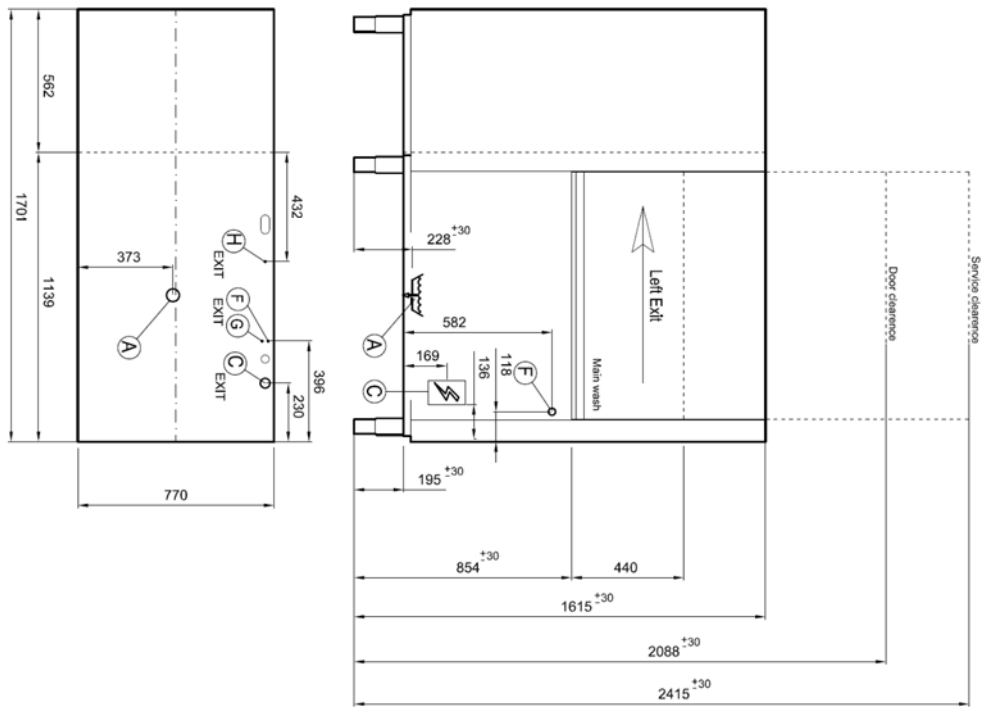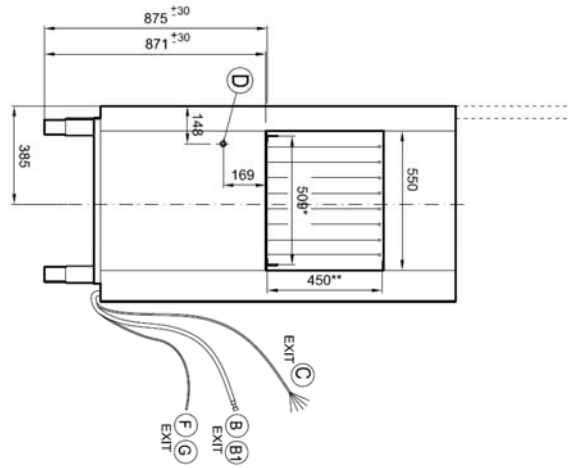

L		Ø 250	Dryer suction
---	--	-------	---------------

Designed by:	MILPUCCI	15.05.2015	Denominazione:	Rack Type	Code:	T201S	Rev.:	00
Installation layout				Rack Type				