


10/2021

# **Mod: AL4S/FGS**

**Production code: AT68V1511-DM+KAST0001\_**

	Modello - Model - Model - Gerätetyp		AL4S/FGS
		STG	
<input type="checkbox"/>	<b>Descrizione</b> - Description - Description - Beschreibung		53 x 80 PV
	<b>Range</b>		-3°C +35°C
<input type="checkbox"/>	<b>Funzionamento</b> - Operating Mode - Mode de fonctionnement - Betriebsmodus S = Statico - Static - Statique - Stille Kühlung V = Ventilato - Ventilated - Ventile - Umluftkühlung		V
	<b>Capacità lorda</b> - Gross Capacity - Capacité brute - Bruttovolumen	l	750
	<b>N° programmi</b> - N° programs - N° programmes - N° Programme		20
	<b>N° cicli</b> - N° cycles - N° cycles - N° Zyklen		6
	<b>Dimensioni esterne</b> - External Dimension - Dimensions externes - ußenabmessungen		
	Lunghezza - Width - Largeur - Breite	mm	790
	Profondità / con porte aperte - Depth / with open doors Profondeur avec portes ouverte - Tiefe/mit geöffneter Tür	mm	1095 / 1750
	Altezza - Height - Hauteur - Höhe	mm	2025
	<b>Dimensioni interne</b> - Internal Dimension - Dimensions internes - Innenabmessungen		
	Lunghezza - Width - Largeur - Breite	mm	640
	Profondità - Depth - Profondeur - Tiefe	mm	860
	Altezza - Height - Hauteur - Höhe	mm	1360
	<b>Porte</b> - Doors - Portes - Türen		1, Glass
	<b>Dotazione Standard</b> - Standard Equipment - Equipement standard - Standardausstattung		2 coppie Guide + 8 Ganciere 2 pairs of slides + 8 Meat hangers 2 glissières + 8 crochets réglables 2 paar führungen + 8 Fleischgehänge
	<b>Interasse teglie</b> - Pans pitch - Pas des bacs - Backblecheabsatz	mm	67
<input type="checkbox"/>	<b>Luce interna</b> - Internal light - Eclairage intérieure - Innerbeleuchtung		●
	<b>Serratura</b> - Lock - Serrure - Schloss		●
	<b>Sbrinamento</b> - Defrost - Dégivrages - Abtauen		
	Type		Electric
	N° Defrost in 24 hrs.		6
	Evaporazione acqua sbrinamento - Evaporation of defrost water Evaporation eau de dégivrage - Tauwasserverdunstung		Automatic Hot Gas
	<b>Compressor</b>		
	Model		NEU6210Z
	Potenza - Power - Puissance - Leistung	HP	1/3+
	T° Evaporation	°C	-10
	Potenza frigorifera - Refrigerant Power - Puissance frigorifique - Kälteleistung	watt	680
	<b>Refrigerante</b> - Refrigerant type - Réfrigérant type - Kältemitteltyp		R134a / 1430
	<b>Quantità di refrigerante</b> - Refrigerant quantity - Quantité de réfrigérant - Kältemittelmenge	gr	370
	<b>Classe Climatica</b> - Climate Class - Classe Climatique - Klima Classe		4 30°C-55%
	<b>Potenza Sistemi Riscaldanti</b> - Heating Power	watt	700
	<b>Potenza Generatore Vapore</b> - Steam generator power	watt	40
	<b>Potenza assorbita REFRIGERAZIONE</b> - Power - Puissance - Leistung	watt	450 / 5,2 A max
	<b>Tensione alimentazione</b> - Supply Voltage - Tension d'alimentation - Anschlussspannung	V	230V~ 50Hz
	<b>Noise Level</b>	dbA	53
	<b>Peso Netto</b> - Net weight - Poids net - Netto Gewicht	kg	160

● = Dotazione di serie - Standard equipment - Dotation standard - Serien Ausstattung □ = Optional

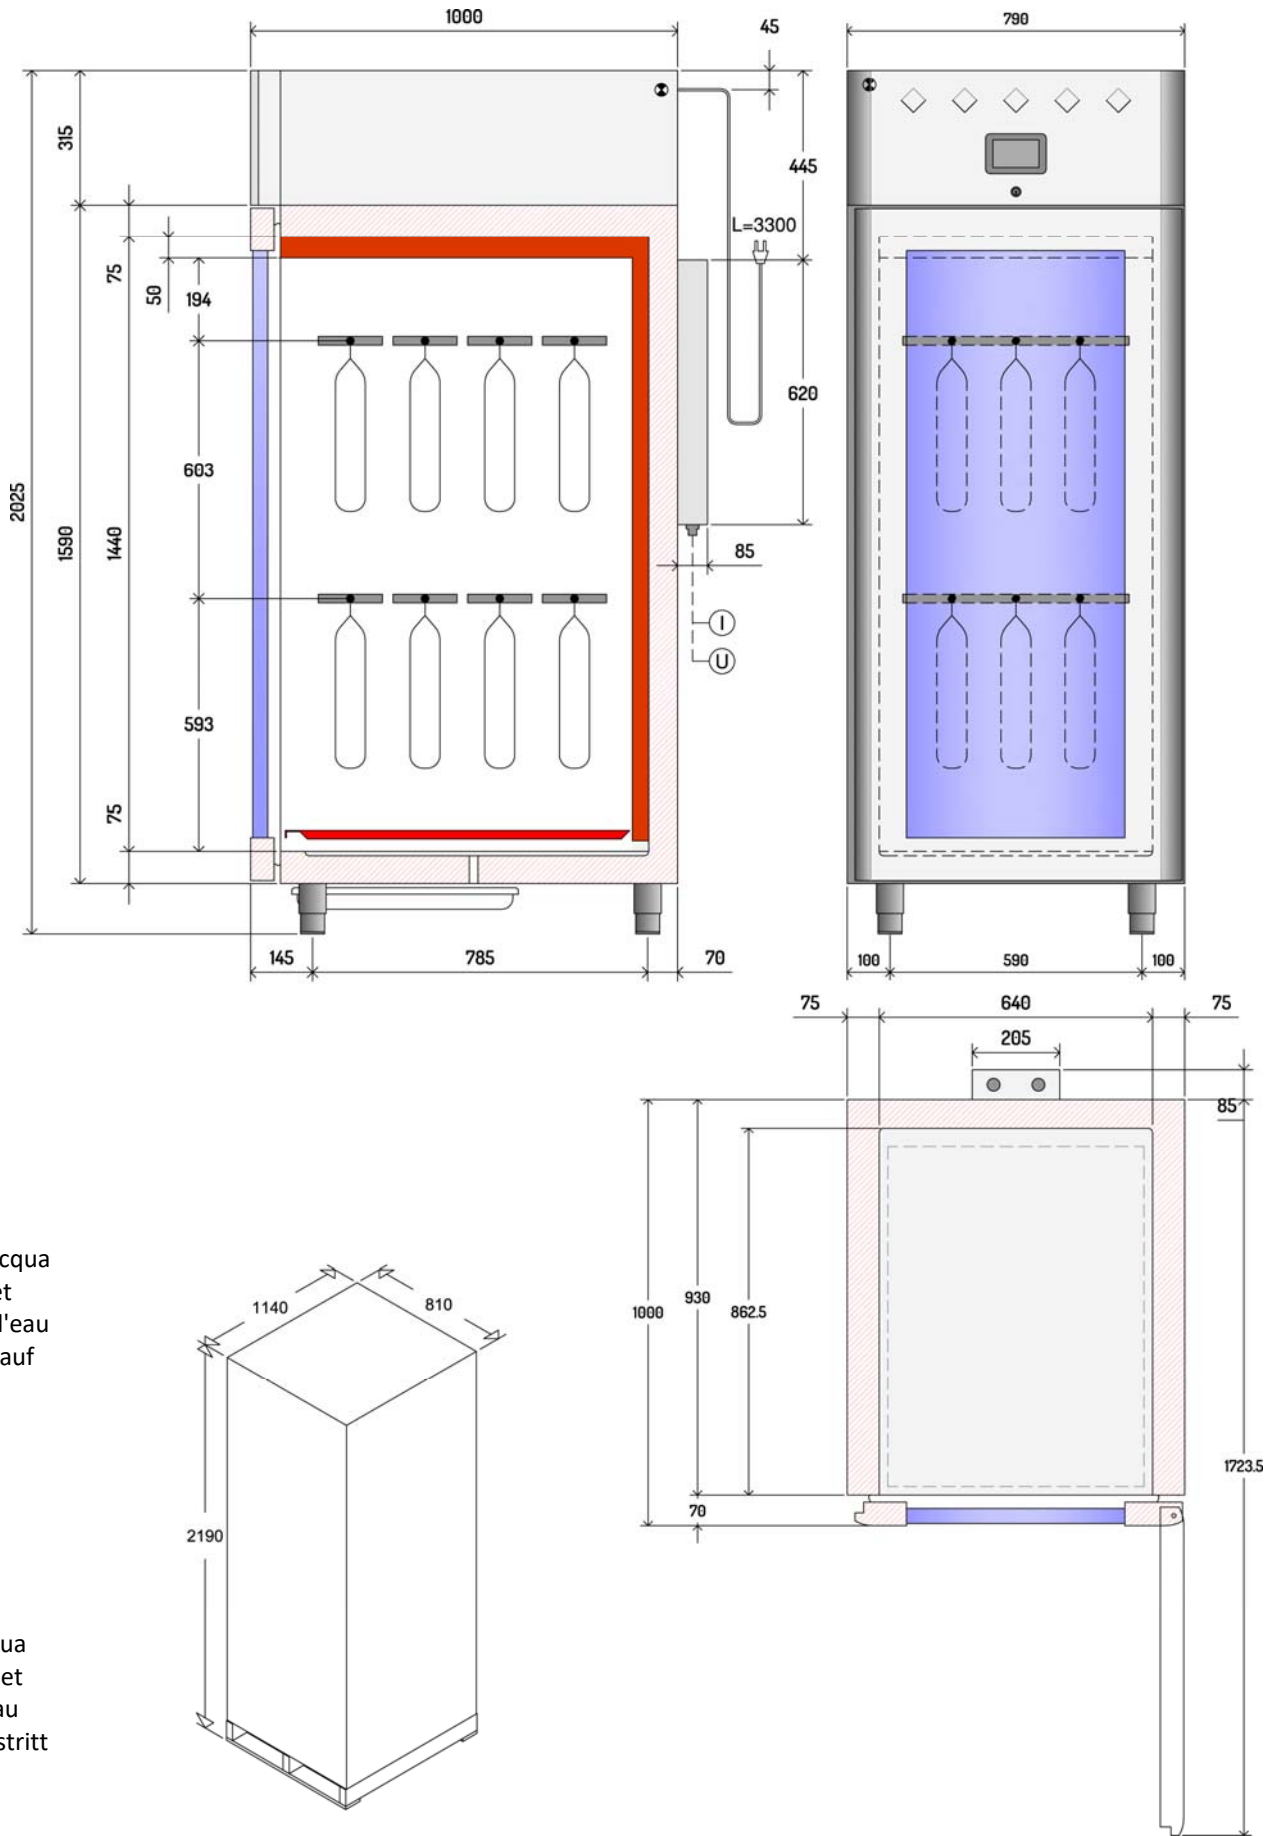

I

Ingresso acqua  
Water Inlet  
D'entrée d'eau  
Wasserzulauf  
ø3/4"

U

Uscita acqua  
Water Oulet  
Sortie d'eau  
Wasseraustritt  
ø3/4"

