

MOD:WR-C2020-6M

Production code : IPAM402A

WALL SADDLE MONOBLOCK TECHNICAL DATA SHEET MOD.WR-C2020-6M

Technical data

Type	Compact
Mounting	Wall
Code	IPAM402A
Condensation	Air
Net weight	50,0 Kg
PED	1
Defrost	Hot gas
Expansion	Capillary
Application	MBP
Refrigerant	R452A

Dimensions

Width W	400 mm
Depth D	922 mm
Height H	800 mm

Absorption

Power consumption	700 W - 790 W
Current consumption	3,5 A - 4 A

Condenser

Number of fan-motors	1
Diameter	254 mm
Air flow	700 m ³ /h

Evaporator

Number of fan-motors	1
Diameter	254 mm
Air flow	800 m ³ /h
Air throw	6 m

Compressor

Type	Hermetic
Number of compressors	1 (AE4460Z)
Brand	TECUMSEH
Voltage	220-240/1/50
Displacement	10,33 cm ³ -1/2hp



LED light



Magnetic door micro-switch

Table of cooling capacities in W and in cold room m³ - MOD. IPAM402A - R452A

AMBIENT T.	COLD ROOM T.									
	5°C		2°C		0°C		-2°C		-5°C	
	W	m ³	W	m ³	W	m ³	W	m ³	W	m ³
25°C	1190	15,1	1100	11,5	1040	9,5	990	8,3	910	6,4
32°C	1090	9,7	1010	7,4	960	6,2	910	5,3	830	4,1
38°C	1000	7,3	930	5,6	880	4,7	830	4	760	3
43°C	920	6,5	850	4,9	810	4,2	760	3,4	700	2,6



Technical features (standard)

- Structure in zinc-plated metal sheet coated with epoxy primer and powder;
- Easily removable front cover to facilitate both verification and maintenance operations;
- Internal arrangement of components designed to facilitate their maintenance;
- Hermetic compressors with thermal motor protection;
- Heat exchangers with striped copper and aluminium pipes;
- Air condensation;
- Air evaporation;
- Capillary or thermostatic valve expansion;
- Programmable hot gas defrosting;
- Heating cable for condensate drain in both NT and LT;
- Stainless steel tray for condensed water evaporation equipped with a copper coil with cataphoresis coating and an overflow exhaust pipe;
- High-pressure safety pressure switch (automatic reset/fixed setting);
- Electronic control unit;
- Programmable electronic board with touch control display;
- Control unit designed for remote management via Wi-Fi module (optional);
- Cold room light with cable L=2,5m;
- Magnetic micro-switch with cable L=2,5m;
- Power cable L=2,5m;
- Packaging with wooden pallet and cardboard (included)

Optional on request

- Plug-in kit th.100 mm without hooks 400 series;
- Plug-in kit th.60 mm with hooks 400 series;
- Plug-in kit th.80 mm with hooks 400 series;
- Plug-in kit th.100 mm with hooks 400 series;
- Plug-in kit th.120 mm with hooks 400 series;
- Plug-in kit th.140 mm with hooks 400 series;
- Low-pressure switch (automatic reset/fixed setting);
- Wi-Fi module for remote management;
- Condenser fan speed control with pressure switch;
- Condenser fan speed control with pressure speed variator;
- Compressor crankcase heater;
- Remote control panel with cable of 5/10/15/20m;
- Length increase for machine's power cables, light cable and door micro-switch cable (5/10/15/20m);
- Voltage monitor for three-phase application;
- Packaging with wooden cage;
- Cataphoresis treatment on evaporator and/or condenser;

400 series wall monoblock dimensions

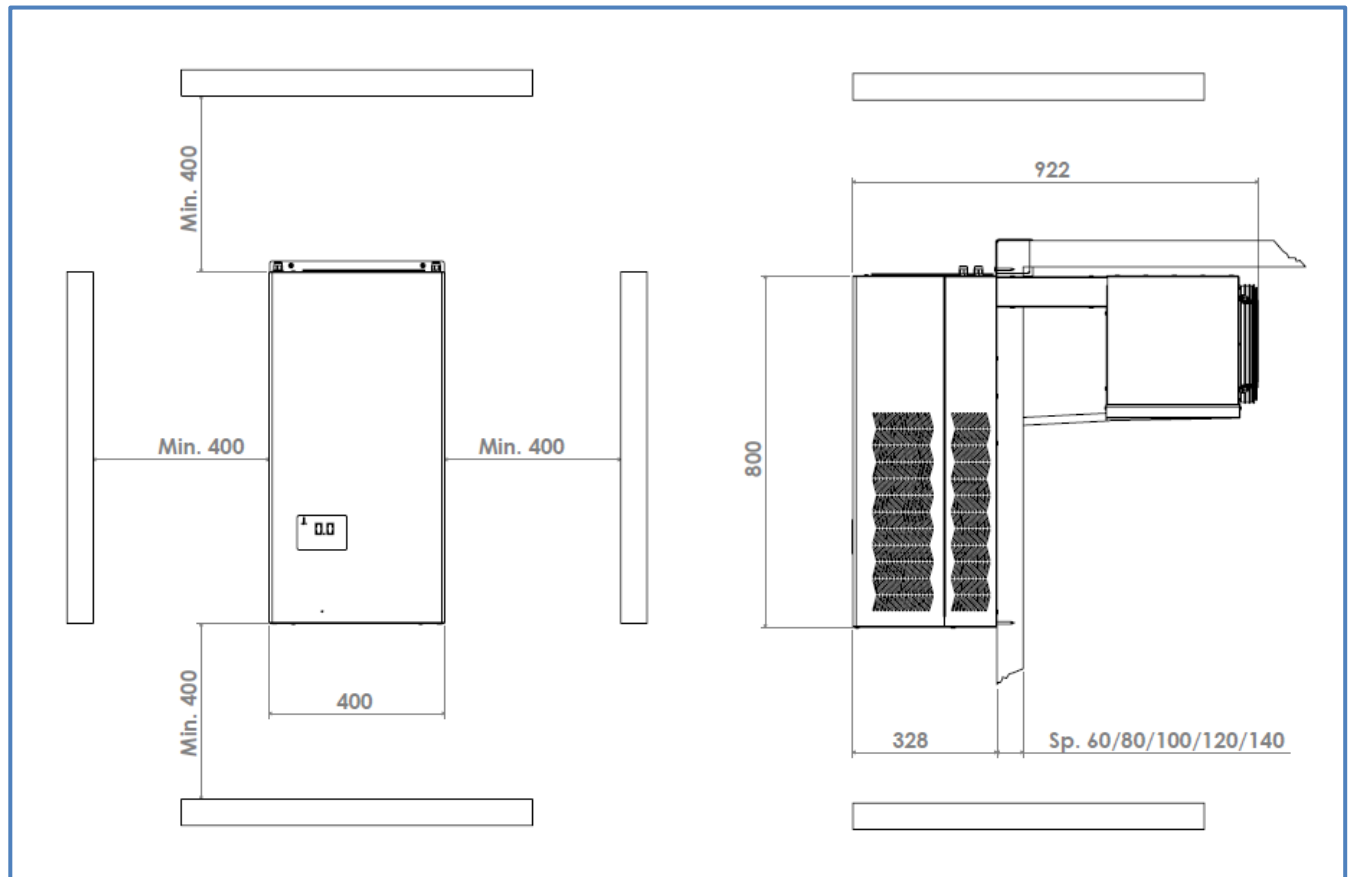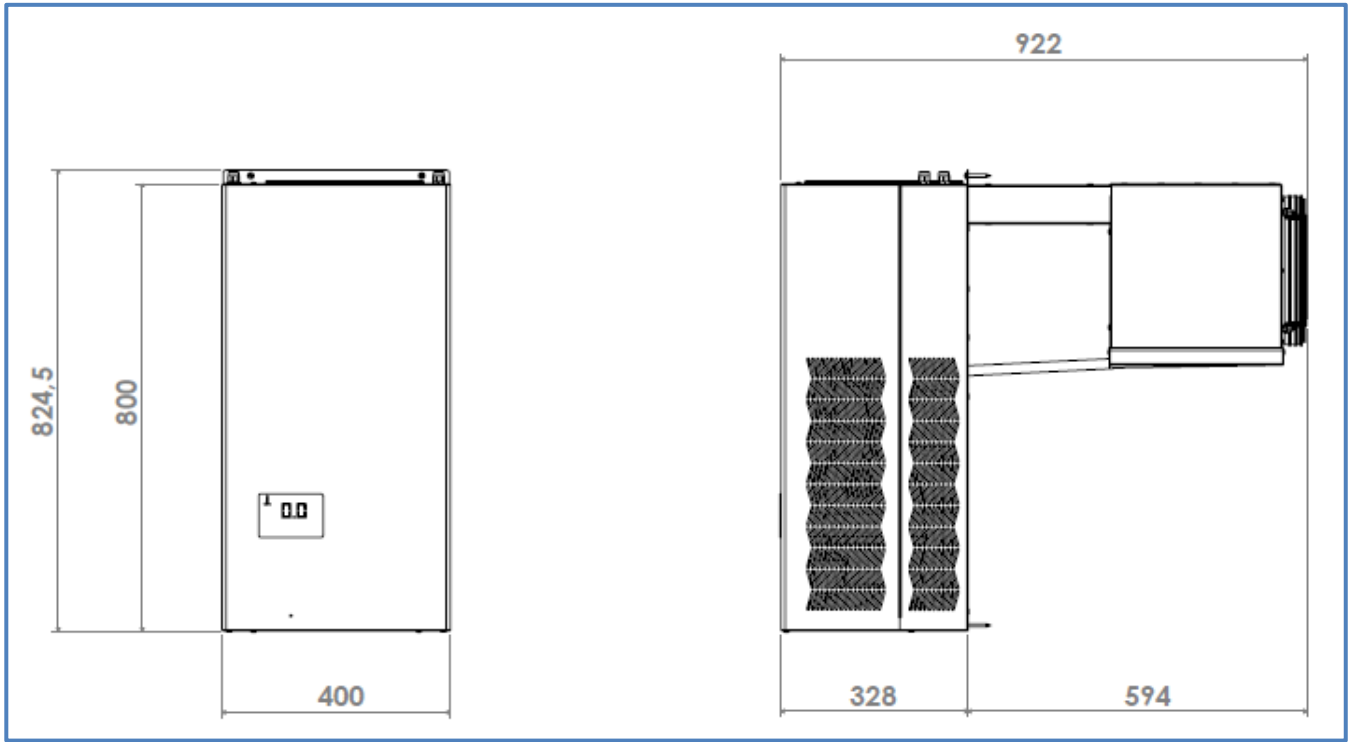

Hole size in the cold room panel

